

8 - 24 volt dc Commercial duty pump Non-self-priming for hot water circulation

- Long life 'brush-less' DC motor with sealess magnetic drive pump. (No shaft seal to leak)
- Voltage range 8 to 24v dc
- Adjustable power consumption high efficiency (0.25 to 1.8amp)
- Variable flow 5 settings
- Non-corroding materials
- Temperatures up to 80°C
- Suitable for hot water systems
- Non-self-priming requires flooded suction

59

3⁄4"


- Supplied with mounting bracket
- Not suitable for seawater

89

3/4"

♦ Weight: 0.50Kg



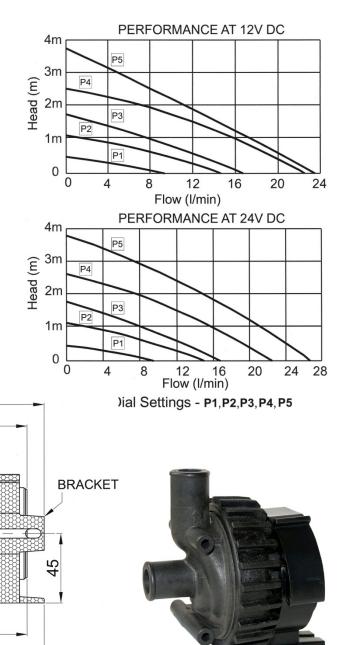

Dimensions in mm

Xylem Water Solutions UK Ltd Bingley Road • Hoddesdon • Hertfordshire • EN11 0BU • UK

doc631/12



104

Telephone: +44 (0)1462 480380 Fax: +44 (0)1462 482422 mail@cleghorn.co.uk www.jabscoshop.com

76

65

90

101