





## DIMENSIONS:

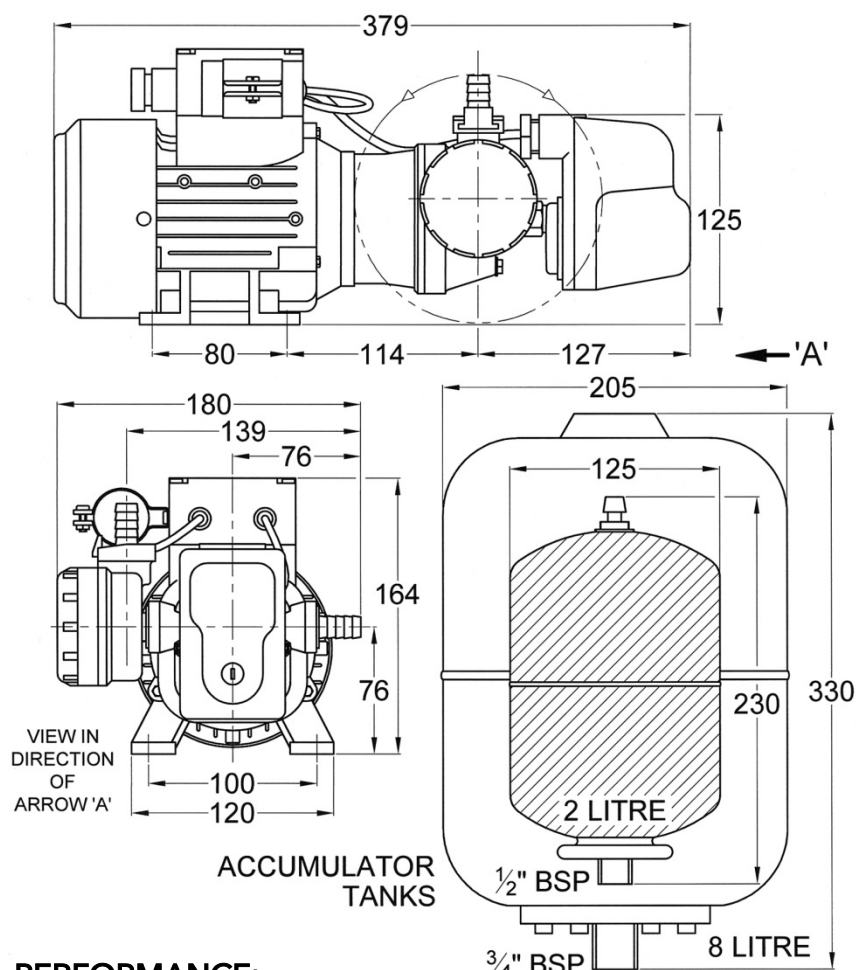

## PERFORMANCE:

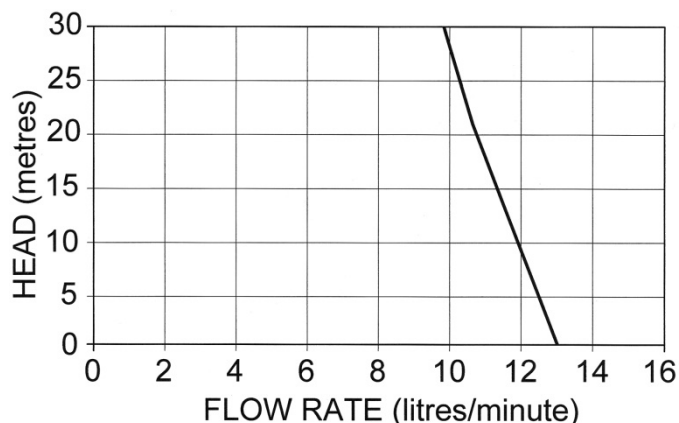

DOC571/11

# CW499 SERIES

## 230V 50Hz

### WATER PRESSURE SYSTEM

- ✦ **CW499-2** with 2-litre accumulator tank, for small fresh and saltwater pressure systems
- ✦ **CW499-8** with 8-litre accumulator tank, for fresh and saltwater pressure systems. Recommended for salt water filling of toilet cisterns
- ✦ Complete self-priming pressure system with accumulator tank (2 or 8 litres, membrane type), its mounting bracket, heavy-duty adjustable pressure switch and inlet strainer.
- ✦ Corrosion resistant materials suitable for use with fresh or salt water
- ✦ Wired ready for use

## OUTPUT:

Up to 13 litres/minute open flow

## SELF PRIMING:

Self primes up to 1.5 metre (5 ft) max

## PUMP CONNECTIONS:

1/2" hose connections and/or 1/2" BSP suitable for use with **HD26A/15W** or **CW194W** connector for 15mm Hep2O push-fit pipework

## PRESSURE SWITCH:

Standard settings:

**CUT-IN:** 1 bar (15psi) 10m head

**CUT-OUT:** 2 bar (30psi) 20m head

**MAX CUT-OUT:** 3 bar (45psi) 30m hd

## MATERIALS OF CONSTRUCTION:

- Pump body:** Glass-filled Polypropylene
- Diaphragm:** Santoprene
- Valves:** EPDM
- Motor Frame:** Painted aluminium
- Motor Enclosure:** IP55 standard
- Motor Power:** 0.12Kw

Xylem Water Solutions UK Ltd  
Bingley Road • Hoddesdon •  
Hertfordshire • EN11 0BU • UK

Tel: 1462 480380

Fax: 01462 482422

mail@cleghorn.co.uk www.jabscoshop.com